



# Impact Wrench

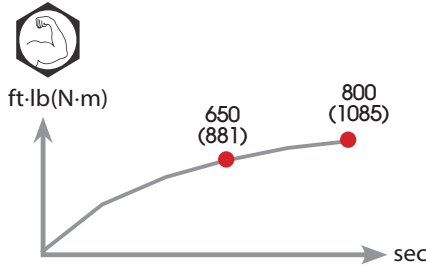

## 33431

- One-handed F / R control
- Convenient to switch on both sides
- 3-speed regulator for precise control
- Ergonomic design interchangeable rubber grip



| KT NO.    | Square drive<br>Inch mm | Type<br>Std./Long<br>anvil | Std. bolt size<br>Inch mm | Free speed<br>R.P.M | Max. torque<br>ft-lb N-m | Overall length<br>Inch mm | Air inlet<br>Inch | Air hose<br>ID | Air pressure<br>bar psi | Avg. air<br>consumption<br>L/min CFM | Sound<br>DBA | Vib<br>M/S <sup>2</sup> | Net weight<br>kgs lbs |
|-----------|-------------------------|----------------------------|---------------------------|---------------------|--------------------------|---------------------------|-------------------|----------------|-------------------------|--------------------------------------|--------------|-------------------------|-----------------------|
| 33431-065 | 1/2" 12.70              | Std.anvil                  | 3/4" M19                  | 8000                | 650 881                  | 6-7/8" 175                | 1/4"BSPT          | 3/8"           | 6.2 90                  | 139 4.9                              | 101.50       | 9.37                    | 2.58 5.69 1 / 8       |

## 33611

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust



3/4"  
33611



## 33621 / 33622



3/4"  
33621



3/4"  
33622



| KT NO.    | Square drive<br>Inch mm | Type<br>Std./Long<br>anvil | Std. bolt size<br>Inch mm | Free speed<br>R.P.M | Max. torque<br>ft-lb N-m | Overall length<br>Inch mm | Air inlet<br>Inch | Air hose<br>ID | Air pressure<br>bar psi | Avg. air<br>consumption<br>L/min CFM | Sound<br>DBA | Vib<br>M/S <sup>2</sup> | Net weight<br>kgs lbs |
|-----------|-------------------------|----------------------------|---------------------------|---------------------|--------------------------|---------------------------|-------------------|----------------|-------------------------|--------------------------------------|--------------|-------------------------|-----------------------|
| 33611-055 | 3/4" 19.05              | Std. anvil                 | 7/8" M20                  | 6500                | 700 949                  | 7-13/32" 188              | 1/4"BSPT          | 3/8"           | 6.2 90                  | 125 4.4                              | 96.56        | 8.64 3.00               | 6.61 1 / 8            |
| 33611-056 | 3/4" 19.05              | Std. anvil                 | 7/8" M20                  | 6500                | 700 949                  | 7-13/32" 188              | 1/4"NPT           | 3/8"           | 6.2 90                  | 125 4.4                              | 96.56        | 8.64 3.00               | 6.61 1 / 8            |
| 33621-075 | 3/4" 19.05              | Std. anvil                 | 1" M24                    | 6500                | 800 1085                 | 8-63/64" 228              | 1/4"BSPT          | 3/8"           | 6.2 90                  | 198 7.0                              | 97.28        | 6.89 4.50               | 9.92 1 / 4            |
| 33621-076 | 3/4" 19.05              | Std. anvil                 | 1" M24                    | 6500                | 800 1085                 | 8-63/64" 228              | 1/4"NPT           | 3/8"           | 6.2 90                  | 198 7.0                              | 97.28        | 6.89 4.50               | 9.92 1 / 4            |
| 33622-075 | 3/4" 19.05              | Long anvil                 | 1" M24                    | 6500                | 800 1085                 | 12-63/64" 330             | 1/4"BSPT          | 3/8"           | 6.2 90                  | 198 7.0                              | 96.68        | 6.46 5.00               | 11.02 1 / 4           |
| 33622-076 | 3/4" 19.05              | Long anvil                 | 1" M24                    | 6500                | 800 1085                 | 12-63/64" 330             | 1/4"NPT           | 3/8"           | 6.2 90                  | 198 7.0                              | 96.68        | 6.46 5.00               | 11.02 1 / 4           |