

Torque Angle Adapter


34417-1A

Specifications:

Accuracy	Clockwise: $\pm 2\%$ Anti-Clockwise: $\pm 2\%$				
Memory	10				
Unit Selection	N·m	ft·lb	in·lb	Kgf·m	Kgf·cm
Display Resolution	0.1	0.1	1	0.01	1
Operation Mode	Torque / Angle / Torque+Angle				
Battery	DC3V, CR2032				
Battery Life	4hrs (continuous operation)				
Operating Ambient Temperature	$-10^{\circ}\text{C} - 60^{\circ}\text{C}$ ($14^{\circ}\text{F} - 140^{\circ}\text{F}$)				
Storage Temperature	$-20^{\circ}\text{C} - 70^{\circ}\text{C}$ ($-4^{\circ}\text{F} - 158^{\circ}\text{F}$)				
Operating Relative Humidity	15 to 90% noncondensing				
Switch Off Automatically	100 seconds				
Warning Light	Green, Yellow, Red				
Overload Alarm	240 N·m (177 ft·lb)				




4
PC.

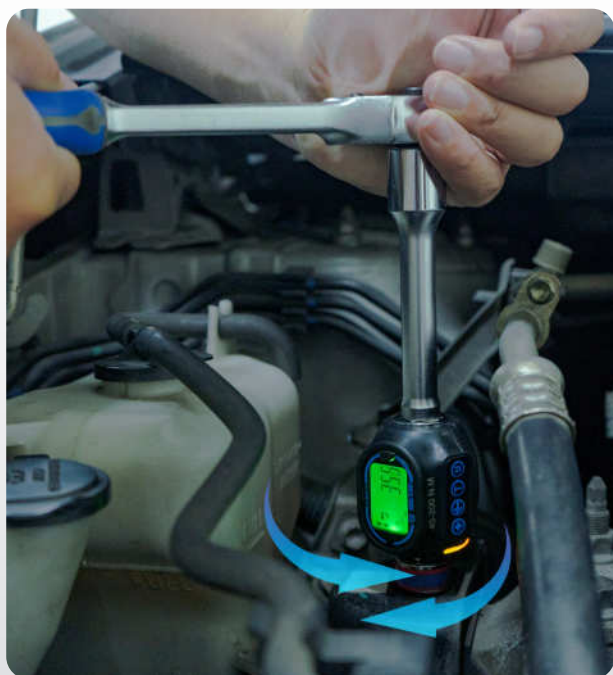

- The LED screen is backlit for easier reading



- The ring-shaped warning light can provide an immediate visual cue for the torque values



- The body can be rotated 240° for easier reading

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range				
		N·m	ft·lb	kgf·m		
34417-1A	1/2"	40 ~200 N·m	29.5~147.5 ft·lb	4.08~20.38 kgf·m	620	1 / 12



KINETO

N21