



Torque Technology

SYSTEM 5000 CLT



SYSTEM 5000 CLT

5000 CLT Torque wrench · SYSTEM 5000 CLT · $\pm 4\%$ accuracy · 20–320 Nm

Made in Germany

- Click-Lens-Type with value readout in the display guarantees security for the user

(E) 125 1/2

- $\pm 4\%$ accuracy of scale value (in direction of actuation)

Safety:

- Haptic (close-gap release)
- Audible ("click" sound)

- Reversible ratchet

- Easy and safe adjustment of the desired torque value by turning the handle

- Knob for additionally locking the set value

- Three large digits for an easy-to-read torque setting

- With calibration certificate and serial number

- Secure storage in safe box with display window

- Surface: hard chrome plated

- DIN EN ISO 6789-2:2017,
DIN 3120, ISO 1174-1



HAZET No.	Output	<i>l</i> mm	<i>a</i> mm	<i>b</i> mm	Release accuracy tolerance %	Nm	Nm	kg	EAN-No. 4000896+
5121-2 CLT	■ 12.5 = 1/2"	435	19.6	44	4	20–120	1	5.9–37.0	104215
5122-2 CLT	■ 12.5 = 1/2"	545	19.6	44	4	40–200	1	9.0–47.4	104192
5123-2 CLT	■ 12.5 = 1/2"	660	19.6	44	4	60–320	2	10.8–59.4	104222


SYSTEM 6000 CT

6000-1 CT Torque wrench · SYSTEM 6000 CT · $\pm 2\%$ accuracy · 6106-1 CT 4% · 1–40 Nm


Made in Germany

- Safety:**
 - Haptic (close-gap release)
 - Audible ("click" sound)
- Easy and safe adjustment of the desired torque value by turning the handle
- Especially slim design thanks to spring-loaded puller sleeve for locking the setting values
- Accuracy $\pm 2\%$ of scale value** (in direction of actuation)
6106-1 CT $\pm 4\%$ accuracy of scale value
- Application: engines, gearboxes, machinery, industry, model making
- With calibration certificate and serial number
- DIN EN ISO 6789-2:2017, DIN 3120, ISO 1174-1

(E) 6.3 1/4

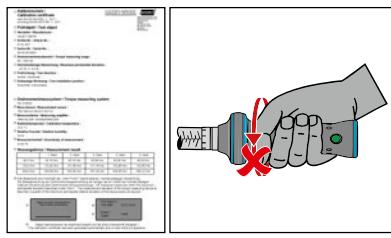

360°

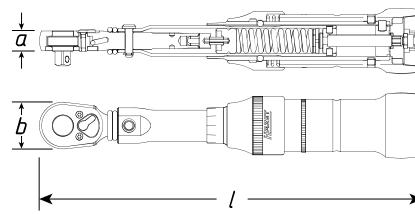

* = 6109-2 CT and 6109-2 CT CAL outside the DIN series, as the maximum torque value of the square specified in the standard 6789-1:2017 is exceeded

HAZET No.	Output	<i>l</i> mm	<i>a</i> mm	<i>b</i> mm	Release accuracy tolerance %	Nm	Nm	Signal transmitter	kg	EAN-No. 4000896+
6106-1 CT	■ 6.3 = 1/4"	197	10.2	24	4	1–6	0.1	✗	0.7–4.4	173167
6108-1 CT	■ 6.3 = 1/4"	198	10.2	24	2	2–10	0.2	✗	1.4–7.3	062218
6109-2 CT *	■ 6.3 = 1/4"	256	10.2	24	2	4–40	0.4	✗	2.0–21.4	080564

- Torque wrench including DAkkS calibration certificate

6106-1 CT CAL ■ 6.3 = 1/4" 197 10.2 24 4 1–6 0.1 ✗ 0.7–4.4 192892