



Torque Technology


SYSTEM 5000 CT





5200-3 CT Torque wrench · SYSTEM 5200-3 CT (with insert square) · ± 3% accuracy · 10–200 Nm

Made in Germany

- **Plug-and-socket connection to hold insert tools**
- **Accuracy ± 3% of scale value** (in direction of actuation)
- **Safety:**
 - Haptic (close-gap release)
 - Audible (“click” sound)
- Designed for rough workshop use
- Wide range of applications for controlled screw tightening in tyre service, bicycle, passenger car and commercial vehicle applications as well as various applications in trade and industry
- Optimised sealing ring to protect against debris
- Handle with better grip for easier power transmission
- Adjustment aid with detent points for optimised operator guidance ensures safe and fast adjustment of the desired torque value by turning the handle
- Safe locking of the setting values by latching function on the rotary assembly
- Rotary assembly in triangular form prevents uncontrolled rolling
- Lock symbols indicate the respective locking status
- Can be attached to the cable loop through openings on the locking rotary assembly
- Easy-to-read, high-contrast scale
- Permanent readability due to laser marking on the scale bush
- Tested in accordance with DIN EN ISO 6789-2:2017
- With calibration certificate and serial number
- Delivery in sturdy Hexa plastic box
- DIN EN ISO 6789-2:2017

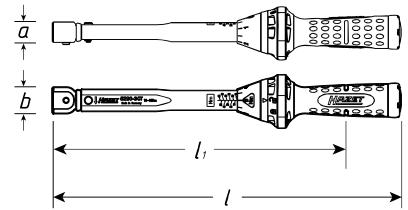

YouTube Clip



HAZET No.	Output	l mm	l_i mm	a mm	b mm	Release accuracy tolerance %	Nm	Nm		EAN-No. 4000896+
5280-3CT	□ 9x12	218	172	17	22	3	2.5–25	0.25	1.3–14.3	239290
5290-3 CT	□ 9x12	291	245	17	22	3	10–60	0.5	3.7–23.4	228904
5292-3 CT	□ 14x18	484	422	23	30	3	40–200	1	8.9–46.6	228911

