



# Torque Technology

## SYSTEM 6000 CT




6000-1 CT Torque wrench · SYSTEM 6000 CT · ± 2% accuracy · 5–800 Nm

**Made in Germany**



- **± 2% accuracy of scale value** (in direction of actuation)
- High-precision premium torque tools – for the highest demands
- **Hard chrome-plated** steel tube – slim, but very sturdy and wear-resistant
- Secure storage in safe box with display window
- Safety:
  - Haptic (close-gap release)
  - Audible ("click" sound)
  - Visual (models with signal transmitter)
- User-friendly reversible ratchet
- **Service-friendly** (do-it-yourself repair sets for ratchets available)
- Integrated shift lever
- Easy and safe adjustment of the desired torque value by turning the handle
- Knob for additionally locking the set value
- Ergonomically shaped handle with collar **reduces the risk of slipping-off and injury**
- Accuracy – fine scale graduation
- 6121-1 CT – 6123-1 CT: shift lever with idle function – reduces risk of injury and malfunction
- With calibration certificate and serial number
- Surface: hard chrome plated
- DIN EN ISO 6789-2:2017, DIN 3120, ISO 1174-1

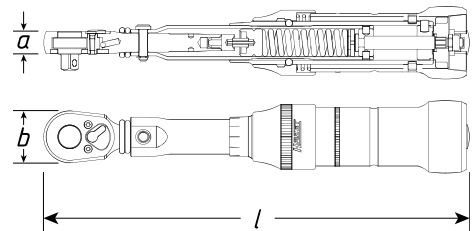

HAZET No.	Output	l mm	a mm	b mm	Release accuracy tolerance %	Nm	Nm	Signal transmitter	EAN-No. 4000886+
6110-1 CT	■ 10 = 3/8"	335	14,5	32	2	5–60	0,5	✗	1,9–24,7 025022
6111-1 CT	■ 10 = 3/8"	389	14,5	32	2	20–120	1	✓	6,7–42,4 025077
6121-1 CT	■ 12,5 = 1/2"	435	19,6	44	2	20–120	1	✓	6,0–37,4 025220
6122-1 CT	■ 12,5 = 1/2"	543	19,6	44	2	40–200	1	✓	9,0–47,5 025268
6123-1 CT	■ 12,5 = 1/2"	659	19,6	44	2	60–320	2	✓	10,8–59,6 025367
• <b>2-component handle</b> for improved feel • Simplified locking for adjusting the torque value • Viewing window for visual checking of the locking • 4 coloured coding rings (red, yellow, green, black) for markings in the case of personalisation or special workflows • Without signal transmitter									
6143-1 CT	■ 20 = 3/4"	802	28,5	64	2	100–400	2,5	✗	14,5–59,2 025466
6144-1 CT	■ 20 = 3/4"	1046	28,5	64	2	200–500	2,5	✗	21,6–54,6 025541
6145-1 CT	■ 20 = 3/4"	1283	28,5	64	2	300–800	2,5	✗	25,9–70,2 025565
• Torque wrench including <b>DAkKS calibration certificate</b>									
6110-1 CT CAL	■ 10 = 3/8"	335	14,5	32	2	5–60	0,5	✗	1,9–24,7 192915
6111-1 CT CAL	■ 10 = 3/8"	389	14,5	32	2	20–120	1	✓	6,7–42,4 193011
6121-1 CT CAL	■ 12,5 = 1/2"	435	19,6	44	2	20–120	1	✓	6,0–37,4 193028
6122-1 CT CAL	■ 12,5 = 1/2"	543	19,6	44	2	40–200	1	✓	9,0–47,5 193233
6123-1 CT CAL	■ 12,5 = 1/2"	659	19,6	44	2	60–320	2	✓	10,8–59,6 193240
• Torque wrench including <b>DAkKS calibration certificate</b> • <b>2-component handle</b> for improved feel • Simplified locking for adjusting the torque value • Viewing window for visual checking of the locking • 4 coloured coding rings (red, yellow, green, black) for markings in the case of personalisation or special workflows									
6143-1 CT CAL	■ 20 = 3/4"	802	28,5	64	2	100–400	2,5	✗	14,5–59,2 192922