



# Torque Technology

## SYSTEM 6000 CT




### 6200-1 CT Torque wrench · SYSTEM 6000 CT · ± 2% accuracy · 5–320 Nm

**Made in Germany**


- Plug-and-socket connection to hold insert tools
- **Accuracy ± 2% of scale value** (in direction of actuation)
- Safety:
  - Haptic (close-gap release)
  - Audible ("click" sound)
  - Visual (models with signal transmitter)
- With calibration certificate and serial number
- Easy and safe adjustment of the desired torque value by turning the handle
- Secure storage in safe box with display window
- DIN EN ISO 6789-2:2017





(E)

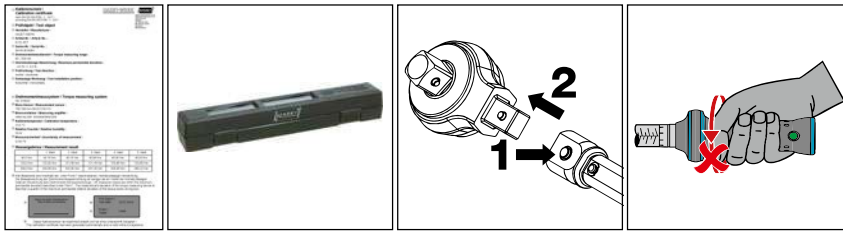

YouTube Clip

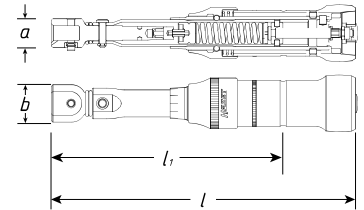

HAZET No.	Output	<i>l</i> mm	<i>l<sub>i</sub></i> mm	<i>a</i> mm	<i>b</i> mm	Release accuracy tolerance %	Nm	 Nm	Signal transmitter		EAN-No. 4000896+
6290-1 CT	□ 9x12	306	252	17	22	2	5–60	0,5	✗	1.8–23.1	026043
6291-2 CT	□ 9x12	389	318	18	23	2	20–120	1	✓	5.9–36.6	026104
6291-1 CT	□ 14x18	401	330	23	30	2	20–120	1	✓	5.5–34.5	026074
6292-1 CT	□ 14x18	511	440	23	30	2	40–200	1	✓	8.5–44.8	026135
6293-1 CT	□ 14x18	625	554	23	30	2	60–320	2	✓	10.3–56.8	026173
• Torque wrench including DAkkS calibration certificate											
6290-1 CT CAL	□ 9x12	306	252	17	22	2	5–60	0,5	✗	1.8–23.1	193097
6291-2 CT CAL	□ 9x12	389	318	18	23	2	20–120	1	✓	5.9–36.6	193257
6291-1 CT CAL	□ 14x18	401	330	23	30	2	20–120	1	✓	5.5–34.5	193264
6292-1 CT CAL	□ 14x18	511	440	23	30	2	40–200	1	✓	8.5–44.8	193271
6293-1 CT CAL	□ 14x18	625	554	23	30	2	60–320	2	✓	10.3–56.8	193288

### 6200-1 CT Torque wrench · SYSTEM 6000 CT · ± 2% accuracy · 100–500 Nm

**Made in Germany**


- Plug-and-socket connection to hold insert tools
- **Accuracy ± 2% of scale value** (in direction of actuation)
- Safety:
  - Haptic (close-gap release)
  - Audible ("click" sound)
  - Visual (models with signal transmitter)
- With calibration certificate and serial number
- Easy and safe adjustment of the desired torque value by turning the handle
- Secure storage in safe box with display window
- **2-component handle** for improved feel
- Simplified locking for adjusting the torque value
- Viewing window for visual checking of the locking
- Knob for additionally locking the set value
- 4 coloured coding rings (red, yellow, green, black) for markings in the case of personalisation or special workflows
- Without signal transmitter
- DIN EN ISO 6789-2:2017





(E) 14 x 18



YouTube Clip

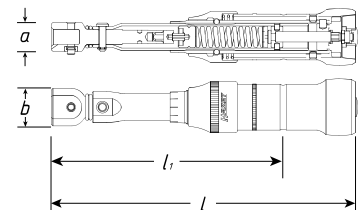

HAZET No.	Output	<i>l</i> mm	<i>l<sub>i</sub></i> mm	<i>b</i> mm	Release accuracy tolerance %	Nm	 Nm	Signal transmitter		EAN-No. 4000896+
6294-1 CT	□ 14x18	718	649	35,5	2	100–400	2,5	✗	14.7–59.9	026197
6295-1 CT	□ 14x18	962	893	35,5	2	200–500	2,5	✗	21.8–55.1	026203

• Torque wrench including DAkkS calibration certificate