



### SYSTEM 6300 CT

- **With lockable torque setting**

- Especially suitable for application in industrial series production

Adjusting the desired torque value with adjustment wrench 6399 in conjunction with HAZET torque tester 7901 E, 7902 E, 7903 E or any other suitable device.

**All torque wrenches of this line (HAZET 6391-6392) are without scale and without signal transmitter**

### 6300 Torque wrench · ±2% accuracy · 6391-10 6% · 1–12 Nm

**Made in Germany**

- **Particularly easy to use thanks to short design**

- **Universal application thanks to connection for insert tools**

- **Accuracy ± 2% (6391-10: 6%) of set value** (in direction of actuation)

- Left tightening with same accuracy possible by reversing the wrench

- Plug-and-socket connection to hold insert tools

- **Permanently adjustable value**

- Especially suitable for application in industrial series production

- Setting the desired torque value with adjustment wrench 6399 together with HAZET torque tester 7901 E, 7902 E, 7903 E or any other suitable device.


**All wrenches of this series (HAZET 6391-6392) are without a scale and a signal transmitter**

- With calibration certificate and serial number

- DIN EN ISO 6789-2:2017



9 x 12

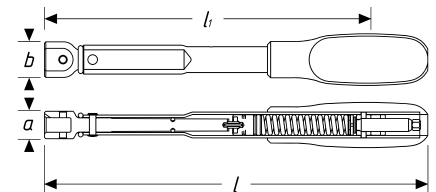

HAZET No.	Output	l mm	l <sub>1</sub> mm	a mm	b mm	Release accuracy tolerance %	Nm		EAN-No. 4000896+
6391-10	□ 9x12	124	102	17	22	6	1–10	0,8–8,4	208951
6391-12	□ 9x12	124	102	17	22	2	2–12	1,7–10,1	027026
• <b>Factory preset triggering value as requested</b>									
6391-12 V	□ 9x12	124	102	17	22	2	2–12	1,7–10,1	145850

### 6300 Torque wrench · ±2% accuracy · 2–35 Nm

**Made in Germany**

- **Accuracy ± 2% of set value** (in direction of actuation)

- Left tightening with same accuracy possible by reversing the wrench

- Plug-and-socket connection to hold insert tools

- **Permanently adjustable value**

- Especially suitable for application in industrial series production

- Setting the desired torque value with adjustment wrench 6399 together with HAZET torque tester 7901 E, 7902 E, 7903 E or any other suitable device


**All wrenches of this series (HAZET 6391-6392) are without a scale and a signal transmitter**

- With calibration certificate and serial number

- DIN EN ISO 6789-2:2017



E 9 x 12

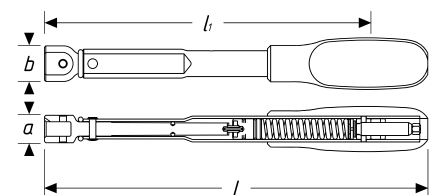

HAZET No.	Output	l mm	l <sub>1</sub> mm	a mm	b mm	Release accuracy tolerance %	Nm		EAN-No. 4000896+
6391-25	□ 9x12	183	143	17	22	2	2–25	1,2–14,7	027040
6391-35	□ 9x12	183	143	17	22	2	15–35	8,8–20,6	027057
• <b>Factory preset triggering value as requested</b>									
6391-25 V	□ 9x12	183	143	17	22	2	2–25	1,2–14,7	145867
6391-35 V	□ 9x12	183	143	17	22	2	15–35	8,8–20,6	145874

Components and spare parts from page 482 to 490

Errors excepted