




Pneumatic Tools

Impact wrenches




9013 TT Twin Turbo impact wrench · long spindle

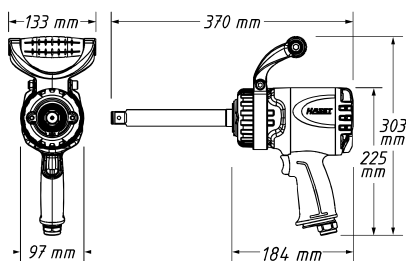

20 3/4"



16.41 (1/2) 7.2

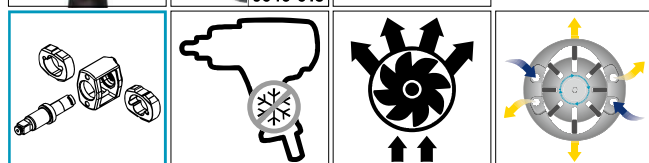

HAZET No.	max. Nm	max. Nm	l/min.	rpm	db (A) LpA	g	EAN-No. 4000896+
9013 Lg TT	3800	2020	243	5200	102.5	5500	232277


Low noise hose for noise reduction of the HAZET Twin Turbo impact wrenches 9013 TT · 9013 Lg TT
Spring clamp for fixing the hose to the handle
9040-013 - - - - - 232994

9014 TT Twin Turbo impact wrench

• Loosening torque: 4100 Nm

25 1"

- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Easy handling
- Short, compact design
- One-hand operation for left and right handers
- Removable handle, 360° adjustable
- Connecting socket for low noise hose
- HAZET Twin Turbo technology – high torques with compact design
- 8-blade air motor with 25% higher impact performance ensures maximum torque
- Powerful twin hammer mechanism
- Air connection inlet: inside thread 20.67 mm (1/2")
- Coupler plug: nominal size 10 (included)
- Recommended torque: 1898 Nm
- Hose diameter (recommended): 19 mm
- Working pressure (bar): 6.3
- Sound power level: 112.9 db(A) Lp W
- Vibration acceleration: 19.11 m/s²
- Loosening torque (max) determined with screw size M: 32
- Forward and reverse: two-stage (forward), single-stage (reverse)
- Cold insulated handle

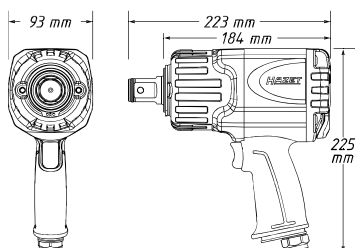


9014 TT Twin Turbo impact wrench

25 1"

YouTube Clip



20.67 (1/2) 10






HAZET No.	max. Nm	max. Nm	l/min.	rpm	db (A) LpA	g	EAN-No. 4000896+
9014 TT	4100	2170	235	5200	101.9	4600	234684

9014 TT Twin Turbo impact wrench · long spindle

• Loosening torque: 3850 Nm

25 1"

- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Easy handling
- Short, compact design with 240 mm long spindle
- One-hand operation for left- and right-handed users
- Removable handle, 360° adjustable
- Connecting socket for low noise hose
- HAZET Twin Turbo technology – high torques with compact design
- 8-blade air motor with 25% higher impact performance ensures maximum torque
- Powerful twin hammer mechanism
- Air connection inlet: inside thread 20.67 mm (1/2")
- Coupler plug: nominal size 10 (included)
- Recommended torque: 1627 Nm
- Hose diameter (recommended): 19 mm
- Working pressure (bar): 6.3
- Sound power level: 113.5 db(A) Lp W
- Vibration acceleration: 17.31 m/s²
- Loosening torque (max) determined with screw size M: 32
- Forward and reverse: two-stage (forward), single-stage (reverse)
- Cold insulated handle

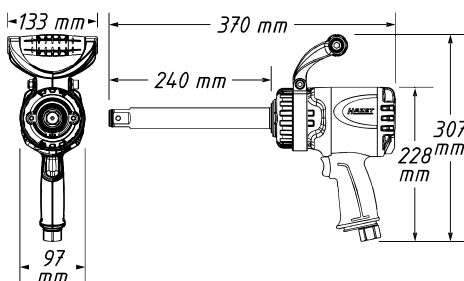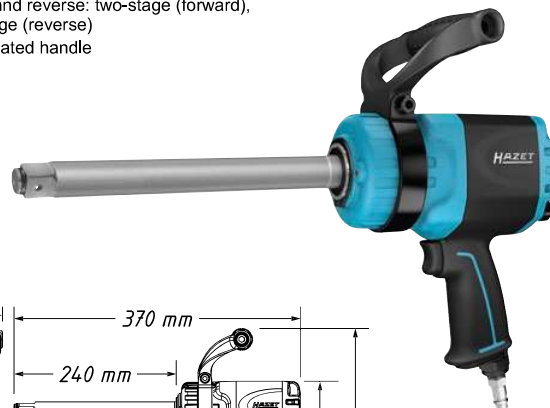

20.67 (1/2) 10

HAZET No.	max. Nm	max. Nm	l/min.	rpm	db (A) LpA	g	EAN-No. 4000896+
9014 Lg TT	3850	1762	235	4600	102.5	5900	234677