


Conjunto / Set


Los extractores 1100 combinan con la serie 1200.

Como medida de la polea a extraer no debe tomarse el mínimo de la guillotina cota B, sino la cota C que es la distancia entre alargaderas.

Serie 1100 push pullers fit series 1200 (splitters).

The relevant measurement is the C (distance between extensions) not the B (pulley axle).



1100

Serie 1100 - 1200

Ref.	€/u.	A	B	C
1102 - 1202A	138,90	100	55	90
1103 - 1203A	166,30	100	80	130
1110 - 1204B	290,00	152	108	175
1120 - 1206B	573,00	220	134	230
1128 - 1208B	835,00	220	180	302
1135 - 1208C	1.403,70	418	180	285
1135 - 1210C	1.833,70	418	250	372
1150 - 1210D	2.549,00	617	250	362
1150 - 1212D	2.978,00	617	300	435
1150 - 1213D	4.015,00	617	300	450




1200



1100S

Serie 1100S - 1200

Ref.	€/u.	A	B	C
1102S - 1202A	125,30	100	55	90
1103S - 1203A	152,70	100	80	130
1110S - 1204B	254,10	152	108	175
1110S - 1206B	377,30	152	77	182
1115S - 1206B	397,30	152	119	220
1120S - 1206B	543,40	220	134	230
1128S - 1206B	645,50	220	155	290
1128S - 1208B	808,50	220	180	302

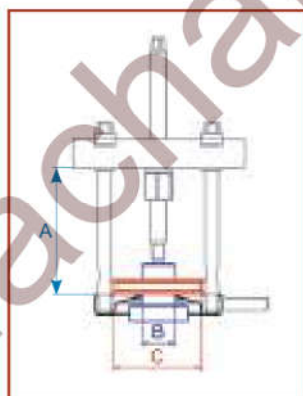

B: Ø del eje. / Axe Ø.

C: Ø máx. de la pieza a extraer / Max. work piece.



La cara plana de la guillotina tiene que apoyar contra la pieza a extraer, si por espacio no cabe, mejor, usar la guillotina plana.

The flat face of the Splitter has to rest against the piece to be extracted, if there is no room for space, it is better to use the flat splitter.


Conjunto de extractores / Puller set


Puente + guillotina + patas

Push puller + splitter + jaws



Ref.	€/u.	Contiene / <i>Contains</i>	⚖
C1102S	171,90	1102S + (2)100250 + 1202A	2,0
C1103S	205,50	1103S + (2)100260 + 1203A	3,0
C1110S	331,90	1110S + (2)101050 + 1204B	6,5
C1115S	486,70	1115S + (2)101060 + 1206B	11,0