


SI-4710

Saw

- Air saw & file
- An improved model over the SI-4700B
- You can use saw blades, as well as 3 different files with this tool
- Low vibration and high power




SI-4710 • SI-4710F



SI-4710F



SI-4710F



SI-4710F

SI-4710F: Saw Blade and 3files set

SI-4710F

Saw blade and 3files set

Saw & File



File Shank Opening mm/(in.)	5/(3/16)
Cutting cap (Steel) mm/(in.)	3/(1/8)
Stroke length mm	10
Free Speed rpm/★	10,000
Weight kg/(lb)	0.80/(1.76)
Noise Level dBA/(power)	85/(97)
Vibration a/k m/s ²	21.0/1.5
Max Air Consumption CFM/(L/S)	6.0/(2.8)
Avg Air Consumption CFM/(L/S)	1.0/(0.5)

★rpm (Stroke Per Minutes)

SI-4740

Saw

- World's smallest and lightest air saw
- Easy to use in tight place
- This model mechanism is same with the SI-4730, worked by rotary air motor and makes working strokes through the gears
- Only 5mm strokes and other parts are not damaged



SI-4740 • SI-4740F




SI-4740 • SI-4740F



SI-4740F



SI-4740F



SI-4740F

SI-4740F: Saw Blade and 3files set

SI-4740F

Saw blade and 3files set



Saw & File



File Shank Opening mm/(in.)	5/(3/16)
Cutting cap (Steel) mm/(in.)	4/(5/32)
Stroke length mm	5
Free Speed rpm/★	10,500
Out Put W	135
Weight kg/(lb)	0.52/(1.15)
Noise Level dBA/(power)	83/(94)
Vibration a/k m/s ²	14.5/1.9
Max Air Consumption CFM/(L/S)	10.2/(4.8)
Avg Air Consumption CFM/(L/S)	1.7/(0.8)

★rpm (Stroke Per Minutes)

Nonstop rotary mechanism

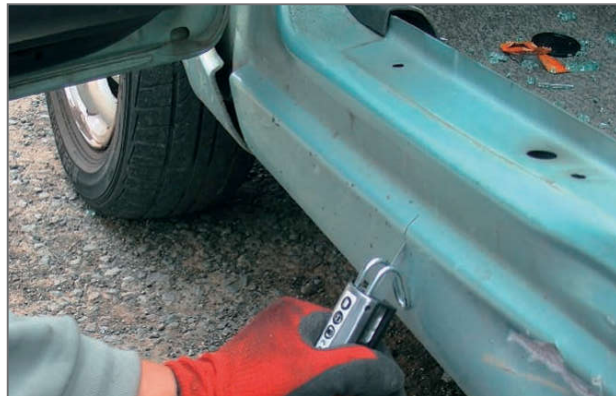

SI-4740F

SI-4600

Nibbler



502-42





502-41

Cutting Width mm/(in.)	4.5/(3/16)
Cutting cap mm/(in.)	1.6/(1/16)
Free Speed rpm/★	2,600
Out Put Watt	316
Weight kg/(lb)	1.00/(2.20)

Noise Level dBA/(power)	88/(99)
Vibration a/k m/s ²	8.6/1.3
Max Air Consumption CFM/(L/S)	19.8/(9.3)
Avg Air Consumption CFM/(L/S)	3.3/(1.6)

SI-4500

Shear



Cutting Width mm/(in.)	5.4/(7/32)
Cutting cap mm/(in.)	1.6/(1/16)
Free Speed rpm/★	2,000
Out Put Watt	378
Weight kg/(lb)	1.26/(2.79)

Noise Level dBA/(power)	83 (94)
Vibration a/k m/s ²	4.9/0.9
Max Air Consumption CFM/(L/S)	21.0/(9.9)
Avg Air Consumption CFM/(L/S)	3.5 (1.6)

SI-2018A

SI-2018A-6

6mm Collet model



330-24



330-19


SI-2018A-6

Collet Size	ø1/4"	ø6mm
Free Speed rpm/★	26,000	26,000
Output Watt	361	361
Weight kg/(lb)	0.91/(2.01)	0.91/(2.01)
Noise Level dBA/(power)	87/(96)	87/(96)
Vibration m/s ²	<2.5	<2.5
Max Air Consumption CFM/(L/S)	25.2/(11.9)	25.2/(11.9)
Avg Air Consumption CFM/(L/S)	4.2/(2.0)	4.2/(2.0)

SI-4300

Oscillation Cutter

- Oscillation cutting tool specially designed to cut the body panels of motorcars
- Two different cutting blades are supplied with the tool
- Specially designed tool for car repair shop
- The depth of the cut can be adjusted



508-45A & 508-44



Disc Size mm	ø63
Oscillating Angle	2.8°
Free Speed rpm/★	20,000
Weight kg/(lb)	0.89
Noise Level dBA/(power)	88 (98)
Vibration a/k m/s ²	4.8/0.9
Max Air Consumption CFM/(L/S)	19.2/(9.1)
Avg Air Consumption CFM/(L/S)	3.2/(1.5)

★rpm (Oscillation Per Minutes)

