


NEW**TF-Z**Torque wrench TORCOFIX TF-Z
20-850 Nm / 15-630 lbf-ft**Use:**

- > Controlled screw tightening in the most common range of 20 - 850 Nm / 15 - 630 lbf-ft
- > Adjustable, releasing and sturdy tubular torque wrench with spigot end for industry and the trades


Features:

- > Classified as per DIN EN ISO 6789-2:2017 Type II Class A; adjusted to a maximum permissible +/-3% deviation and thus with a greater precision than the standard-stipulated +/-4%
- > Incl. traceable test certificate (DIN EN ISO 6789-2:2017)
- > For controlled right- and left-hand tightening (change tool for changing direction)
- > Trunnion mounting in the versions Ø 16 mm and Ø 22 mm
- > Factory depth gauge: 32 mm (Ø 16 mm) or 56 mm (Ø 22 mm)
- > Robust, matt powder-coated tubular steel construction, with galvanized ratchet and high-quality plastic parts

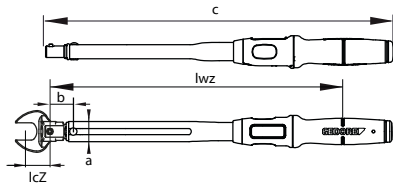

- > New ergonomic handle, shaped according to the natural grip position of the hand
- > Clearly recognisable and tactile hand centring aid and calibration aid in the middle of the handle
- > Double scale Nm / lbf-ft and vernier are protected from abrasion and contamination by an enlarged viewing window
- > With vernier scale for Nm main scale for setting intermediate scale values; lbf-ft setting only via main scale
- > Vertical alignment of the scale, torque adjustment therefore suitable for left and right handers
- > Scale line positioned directly above the scale prevents reading errors (parallax errors)
- > Unit labeling integrated in the scale frame and also protected by viewing windows,
- > Precise jump-off mechanism generates a clearly perceptible and audible trigger signal when the set torque value is reached
- > Incl. roll away protection, prevents rolling away when the tool is put down

Code	No.	Ø	Nm	lbf-ft	السلسله	vernier Nm	lwZ	lcZ	c	⚖️
3278573	TF-Z100	16	20-100	15-75	5 Nm	0,5 Nm	310,3	32,0	385	0,76
3278581	TF-Z200	16	40-200	30-150	10 Nm	1 Nm	401,3	32,0	476	0,92
3278603	TF-Z300	16	60-300	45-220	10 Nm	1 Nm	492,3	32,0	492,3	1,15
3278611	TF-Z400	16	80-400	60-300	10 Nm	1 Nm	582,3	32,0	657	1,55
3278638	TF-Z550	22	110-550	80-405	10 Nm	1 Nm	848,8	56,0	925,5	2,94
3278654	TF-Z850	22	250-850	185-630	10 Nm	1 Nm	1276,8	56,0	1.353,5	4,39

4549 - 4550 - 4551Torque wrench TORCOFIX K
1-850 Nm / 0,75-630 lbf-ft

- > 1/4", 3/8", 1/2" mushroom head square. From 3/4" with square drive
- > For controlled bi-directional tightening
- > You can feel and hear an audible automatic click



- > Highest accuracy max. deviation of +/- 3%
- > Ergonomic system for torque adjustment
- > Double scale Nm and lbf-ft
- > Certificate according to DIN EN ISO 6789:2017 part 2

Code	No.	■"	■mm	Nm	lbf-ft	السلسله	vernier Nm	lw	a	b	d	⚖️
2201429	4549-00	1/4"	6,3	1-5	0,75-3,7	25 Nm / 25 lbf-ft	0,025 Nm	146	25,3	35,0	224	0,432
1545132	4549-02	1/4"	6,3	5-25	3,7-18	1 Nm / 1 lbf-ft	0,1 Nm	206,5	25,3	35,0	284,5	0,680
1545140	4549-05	3/8"	10	10-50	7,5-37	25 Nm / 25 lbf-ft	0,25 Nm	256,5	25,3	35,0	334,5	0,550
7601530	4550-10	1/2"	12,5	20-100	15-75	5 Nm / 5 lbf-ft	0,5 Nm	303,2	36	44,0	394,5	1,340
7601610	4550-20	1/2"	12,5	40-200	30-150	10 Nm / 10 lbf-ft	1 Nm	394,2	36	44,0	485,5	1,344
7601880	4550-30	1/2"	12,5	60-300	45-220	10 Nm / 10 lbf-ft	1 Nm	485,2	36	46,0	577,5	1,504
7674330	4550-40	3/4"	20	80-400	60-300	10 Nm / 10 lbf-ft	1 Nm	583,2	31	62,5	684	1,988
7674760	4550-55	3/4"	20	110-550	80-405	10 Nm / 10 lbf-ft	1 Nm	853,7	31	69,0	957,5	4,224
1521365	4550-75	3/4"	20	150-750	110-550	10 Nm / 10 lbf-ft	1 Nm	1128,7	38	69,0	1.232,5	5,400
1950525	4551-85	3/4"	20	250-850	185-630	10 Nm / 10 lbf-ft	1 Nm	1275,7	38	69,0	1.379,5	5,400