

i TYP ADS-EDS

Torque wrenches with slave pointer Ideal for test, control and maintenance work



1

CLEAR PRODUCT IDENTIFICATION

Provided by the type plate/lable. The article number and the serial number always ensure traceability in the scope of your test- and checking-tool management.

2

SOLID TUBE

Light-metal tube with plastic sleeving.

3

PRACTICAL HANDGRIP

Handgrip shaped in accordance with the most recent ergonomic findings. Resistant to grease and oil.



4

INTEGRATED RATCHET SPINDLE

With double square drive enables highspeed bi-directional tightening.



5

DUAL SCALE

Nm and lbf-in/lbf-ft with main and slave pointers, protected by a strong window made of Trogamid "T".



TECHNICAL INFORMATION

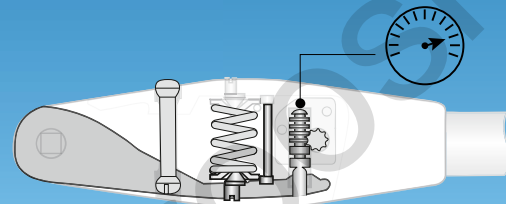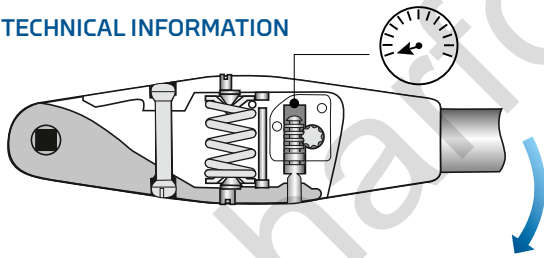

The working principle of the torque wrench with slave pointer type ADS-EDS

ADS - EDS

Torque wrench with slave pointer Type 83
0,8-2000 Nm / 7 lbf-in-1500 lbf-ft



- > Dial-indicating torque wrench with dual scale and slave pointer
- > Controlled tightening (right/left) and checking of tightening values
- > 1/4", 3/8", 1/2", 3/4" or 1" double square drive
- > Models No. ADS4 to No. DDS800S: with integrated ratchet-function

- > Certificate according to DIN EN ISO 6789 +/- 4 % tolerance
- > 5 % overload of the maximum value
- > Light, robust aluminium construction
- > Models No. ADS4 to No. ADS40: EPA (Electrostatic Protected Area) compliant
- > Audio-visual signal is standard on models CDS400S to EDS2000

Code	No.	Type	□"	■mm	Nm	lbf-in	lbf-ft	EPA	↳mm↳	⚙️	Height	⚖️
7651390	ADS4	Double square	1/4"	6,3	0,8-4	7-35		x	244	1 Nm / 1 lbf-in	61	0,52
7651470	ADS12D	Double square	1/4"	6,3	2,4-12	21-105		x	244	5 Nm / 2 lbf-in	61	0,52
7651550	ADS25	Double square	3/8"	10	5-25	44-220		x	244	1 Nm / 10 lbf-in	69	0,52
7651630	ADS40	Double square	3/8"	10	8-40	72-360		x	244	1 Nm / 10 lbf-in	69	0,52
7651710	BDS80E	Double square	1/2"	12,5	16-80		12-60	0	435	2 Nm / 1 lbf-ft	86	1,36
7651980	BDS200	Double square	1/2"	12,5	40-200		30-160	0	515	5 Nm / 5 lbf-ft	86	1,41
7652280	CDS400S	Double square	3/4"	20	80-400		60-300	0	710	10 Nm / 10 lbf-ft	111	3,20
7652010	DDS800S	Double square	3/4"	20	160-800		120-600	0	1.000	20 Nm / 20 lbf-ft	123	4,90
1196790	EDS1400	Double square	1"	25	280-1400		200-1000	0	2.040	25 Nm / 25 lbf-ft	138	16,7
1196804	EDS2000	Double square	1"	25	400-2000		300-1500	0	2.040	50 Nm / 50 lbf-ft	138	16,7