


## OPTIONAL ACCESSORIES:

Code	No.	Designation	C min	C max	
2653176	RZ-DVV40	Reaction arm Z-form offset for DVV40	68	133	1,5
2653184	RL-DVV40	Reaction arm L-form straight for DVV40, 1"	86	234	1,7

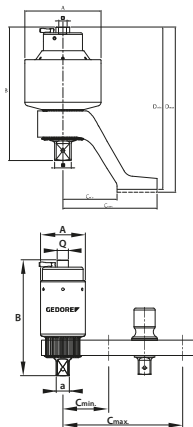


## DVV-60ZRS - DVV-130ZRS

Torque Multiplier DREMOPLUS ALU  
6000-13000 Nm / 4400-9530 lbf·ft



- > Controlled screw tightening and loosening
- > High-performance aluminium housing
- > Transmission ratio 1:18, 1:22, 1:28.5, 1:39
- > All models with return flow protection (RS)
- > Non-destructive overload protection "Slipper" to protect the gearbox, right and left hand
- > With cranked reaction arm Z-shaped
- > Better than +/- 3 % accuracy

- > To operate with a suitable torque wrench


Code	No.	max. Nm output	max. lbf·ft output	Reaction arm		" C	" D	A	B	C min	C max	D min	D max	 max. Nm input	 max. lbf·ft input	
2653117	DVV-60ZRS	6000	4400	Z-Form, cranked	1:18	3/4"	1.1/2"	102	257	110	190	316	324	400	300	6,6
2653125	DVV-80ZRS	8000	5870	Z-Form, cranked	1:22	3/4"	1.1/2"	128	277	110	190	338	342	420	310	9,1
2653133	DVV-100ZRS	10000	7330	Z-Form, cranked	1:28,5	3/4"	1.1/2"	142	292	120	216	350	356	410	305	10,9
2653141	DVV-130ZRS	13000	9530	Z-Form, cranked	1:39	3/4"	1.1/2"	175	306	126	229	(372)	(379)	380	280	17,0

## OPTIONAL ACCESSORIES:

Code	No.	Designation	C min	C max	
2653192	RZ-DVV60	Reaction arm Z-form offset for DVV60	110	194	4,0
2653206	RZ-DVV80	Reaction arm Z-form offset for DVV80	110	190	4,5
2653222	RZ-DVV100	Reaction arm Z-form offset for DVV100	120	215	3,2
2653230	RZ-DVV130	Reaction arm Z-form offset for DVV130	126	229	3,6
2654091	RL-DVV60-80	Reaction arm L-form straight for DVV60-80, 1.1/2"	120	315	4,1

## DVV-540RS

Torque Multiplier DREMOPLUS ALU  
54000 Nm / 40330 lbf·ft



- > Controlled screw tightening and loosening
- > High-performance aluminium housing
- > Better than +/- 3 % accuracy
- > To operate with a suitable torque wrench
- > Can be retrofitted with straight or cranked reaction arm

- > Models with transmission ratio 1:75
- > 1 model with maximum load in the range of max. 54000 Nm
- > Output square with hole for Impact sockets with locking pin and ring

Code	No.	max. Nm output	max. lbf·ft output	Reaction arm		" C	" D	A	B	 max. Nm input	 max. lbf·ft input	
2653168	DVV-540RS	54000	40330	without	1:175	3/4"	2.1/2"	270	415	380	280	64,6