



5000 KV Torque wrench · with protective insulation · SYSTEM 5000 KV (with sliding square) · ± 4% accuracy · 5108 KV · ±6% · 2–120 Nm

Made in Germany

- Can be calibrated
- Long service life / high accuracy

- Option of:
 - Removal
 - Repair (if necessary)
 - Installation
 - Adjustment
 - Calibration

• **Note:** adjustment, possible repairs with removal/assembly of the KV torque wrench only in HAZET Service Center

- Suitable for control of inspection and test equipment
- Sustainable and environmentally sound

- Safety:
 - Haptic (close-gap release)
 - Audible ("click" sound)


- **Right/left release** by plug-in square, thereby tightening at torque setting, both to the right and to the left within the specified tolerance
- Low weight for good handling and fatigue-free work

Product design features

- Slim design in strict accordance with the required insulating properties (material strength/overlaps)
- Smooth transitions on switching and moving parts with ergonomic handle design and calibration notch
- Uniform look even when using other components (e.g. red insulated sockets)
- Attractive colour design of the housing and head with signal colours red/yellow
- Handle colour in black to make a distinction with the colour and to prevent it appearing dirty quickly
- No disturbing projecting parts (e.g. shift lever)
- DIN EN ISO 6789-2:2017, DIN 3120, ISO 1174-1, IEC 60900:2018



YouTube Clip

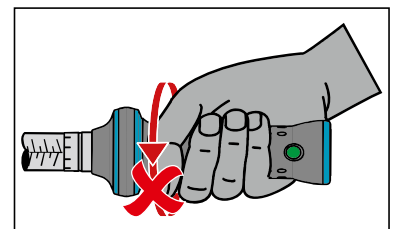

ATTENTION:

Repairs may only be carried out by the HAZET Service Center, as repair works must be followed by a 10,000 V routine test in accordance with IEC 60900

HAZET No.	Output	l / mm	Release accuracy tolerance %	Nm	Nm		EAN-No. 4000896+
5108 KV	■ 10 = 3/8"	275	6	2–10	0,2	1.0–5.0	235421
5109 KV	■ 10 = 3/8"	305	4	5–25	0,5	2.1–11.0	235445
5121 KV	■ 12,5 = 1/2"	420	4	20–120	1	6.0–37.4	233397