

# Impact Bit Socket

KT No. & D1



## 6015M

3/4"

- Hexagon head
- DIN 3121




KT NO.	mm	L mm	Max. torq N-m		
601514M	H14	87	684	310	2 / 48
601517M	H17	87	1136	342	2 / 48
601519M	H19	87	1577	365	2 / 48
601521M	H21	87	2134	508	1 / 24
601522M	H22	87	2436	524	1 / 24
601524M	H24	87	2436	546	1 / 24
601527M	H27	87	2436	597	1 / 24
601530M	H30	87	2436	710	1 / 24
601532M	H32	87	2436	750	1 / 24

## 609616MxxH

609622MxxH 3/4"

- DIN 3121



609616MxxH



609622MxxH

KT NO.	S mm	L mm	L (mm)	Max. torq N-m		
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40
609616M19H	H19	16	77	880	450	4 / 40
609616M22H	H22	16	77	880	473	4 / 40
609622M19H	H19	22	93	1577	670	1 / 24
609622M22H	H22	22	93	2436	692	1 / 24
609622M24H	H24	22	93	2436	706	1 / 24
609622M27H	H27	22	93	2436	730	1 / 24
609622M30H	H30	22	93	2436	744	1 / 24
609622M32H	H32	22	93	2436	783	1 / 24


## 1740



## 609616M

3/4"

- Hex bit & bit holder
- DIN 3121

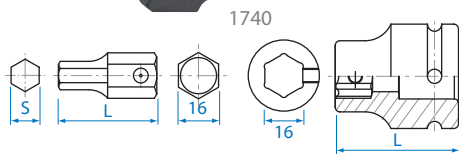

KT NO.	S mm	L mm	Max. torq N-m		
174010H	H10	40	264	46	20 / 400
174012H	H12	40	480	55	20 / 400
174014H	H14	40	684	61	20 / 200
174017H	H17	40	880	72	20 / 200
174019H	H19	40	880	83	20 / 200
174022H	H22	40	880	102	12 / 120
609616M	16	52	-	370	6 / 48


## 1954



## 609622M

3/4"

- Hex bit & bit holder
- DIN 3121

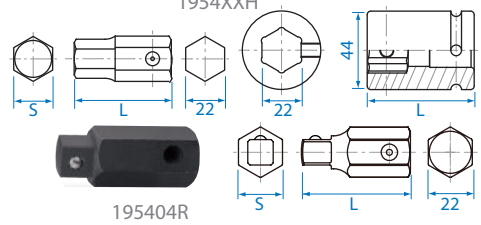


KT NO.	S mm	L mm	Max. torq N-m		
195419H	H19	54.5	1577	159	12 / 120
195422H	H22	54.5	2436	176	12 / 120
195424H	H24	54.5	2436	191	10 / 100
195427H	H27	54.5	2436	217	10 / 100
195430H	H30	54.5	2436	248	6 / 60
195432H	H32	54.5	2436	276	6 / 60
609622M	22	60.0	-	530	6 / 48
195404R	1/2"M	54.5	-	133	12 / 120

# Impact Accessory

## 6797P

3/4"

- Universal joint
- DIN 3121




6797P

KT NO.	Overall length inch	mm	D mm		
6797P	4-1/2	114	44	738	2 / 20

## 6798P

3/4"

- Universal joint
- DIN 3121



6798P

KT NO.	Overall length inch	mm	D (mm)	D1 (mm)		
6798P	4-1/4	108	44	44	749	2 / 20