

Digital Calipers (Three Buttons)


307 Series



307-26-1

FEATURES

- Resolution: .0005" / 0.01mm
- The origin position is retained through the On/Off cycle
- Inch/Metric conversion

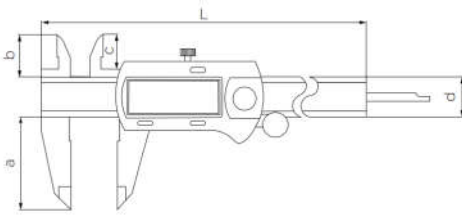

| With Thumb Wheel | Without Thumb Wheel | Inch | | Metric | | Dimensions | | | | |
|------------------|---------------------|-------|----------|---------|----------|------------|------|------|--------|------|
| Code No. | Code No. | Range | Accuracy | Range | Accuracy | L | a | b | c | d |
| 307-26-1 | 307-26-0 | 0-6" | ±.001" | 0-150mm | ±0.02mm | 236mm | 40mm | 21mm | 16.5mm | 16mm |
| 307-28-1 | 307-28-0 | 0-8" | ±.0015" | 0-200mm | ±0.03mm | 286mm | 50mm | 24mm | 19.5mm | 16mm |
| 307-32-1 | 307-32-0 | 0-12" | ±.0015" | 0-300mm | ±0.03mm | 400mm | 60mm | 25mm | 20.5mm | 16mm |

Digital Calipers With Carbide Tipped Measuring Faces


307 Series



307-26-3

FEATURES

- Carbide tipped jaws for inside and outside measurement
- Resolution: .0005" / 0.01mm
- The origin position is retained through the On/Off cycle
- Inch/Metric conversion
- Made of hardened stainless steel

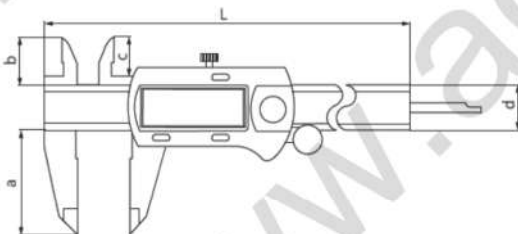

| | Inch | | Metric | | Dimensions | | | | |
|----------|-------|----------|---------|----------|------------|------|------|--------|------|
| Code No. | Range | Accuracy | Range | Accuracy | L | a | b | c | d |
| 307-26-3 | 0-6" | ±.001" | 0-150mm | ±0.02mm | 236mm | 40mm | 21mm | 16.5mm | 16mm |
| 307-28-3 | 0-8" | ±.0015" | 0-200mm | ±0.03mm | 286mm | 50mm | 24mm | 19.5mm | 16mm |
| 307-32-3 | 0-12" | ±.0015" | 0-300mm | ±0.03mm | 400mm | 60mm | 26mm | 21.5mm | 16mm |